
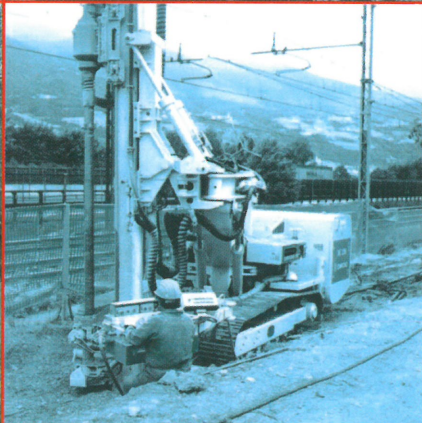
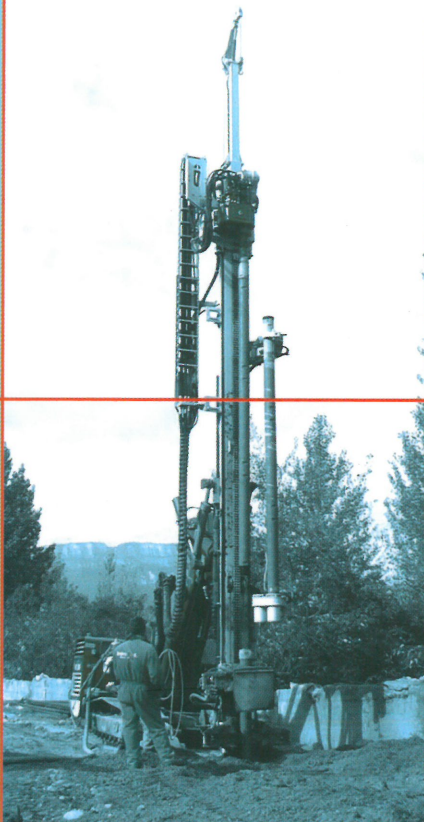


MC 1200

Perforatrice
Idraulica

Hydraulic
drill rig

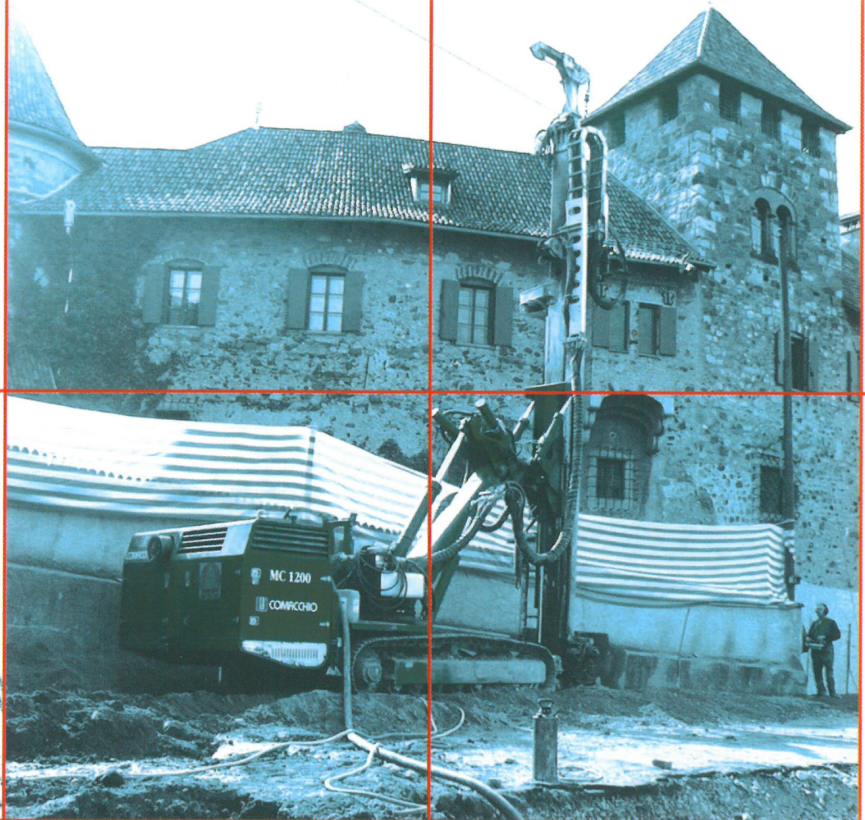

Foreuse
Hydraulique

Hydraulische
Bohrmaschine



COMACCHIO

DRILLING AND FOUNDATION
EQUIPMENT SPECIALIST



MC
1200

Dati Tecnici • Technical Data
Caractéristiques Techniques • Technische Daten



Carro cingolato

Passo cingolo
Larghezza max.
Larghezza suole
Pendenza max.
Velocità max.

Undercarriage

Wheel base
Max. width
Pad width
Max. climbing ability
Max. speed

Chariot chenille

Enpattement
Largeur max.
Largeur patins
Pente max.
Vitesse max.

Fahrwerk

Fahrwerk	2.900 mm	9,5 ft
Gesamtbreite	2.500 mm	8,2 ft
Fussbreite	500 mm	19,6 in
Steighähigkeit max.		50 %
Fahrgeschwindigkeit	1,5 Km/h	0,93 mph

Centrale idraulica

Motore diesel
Potenza motore
Pompa principale
Serbatoio olio
Serbatoio gasolio

Power pack

Diesel engine
Engine power
Main pump
Oil tank
Fuel tank

Centrale hydraulique

Moteur diesel
Puissance moteur
Pompe principale
Réservoir huile
Réservoir diesel

Hydraulikaggregat

Dieselmotor	DEUTZ BF6M 2012C	
Entriebsleistung	132 Kw (180 HP)	/ 2300 rpm
Hydraulische Leistung	2 x 190 lt/min	2 x 50,2 gal/min.
Oiltank	400 lt.	105,6 gal
Dieseltankinhalt	350 lt.	92,5 gal

Mast

Corsa utile
Lunghezza totale
Forza di spinta
Forza di tiro

Mast

Feed stroke
Total length
Feed force
Retract force

Mat

Course utile
Longueur totale
Poussée
Traction

Lafette

Vorschub	4.750/7.200/10.200 mm	15,6/23,6/33,5 ft
Gesamtlänge	7.100/9.550/12.550 mm	23,3/31,3/41,2 ft
Vorschubkraft	7.000 daN	15,736 lbs
Rückzugkraft	7.000 daN	15,736 lbs

Testa di rotazione

Marce
Coppia max.
Giri max.
Passaggio testa
Passaggio girevole

Rotary head

Gears
Max. torque
Max. speed
Head passage
Swivel passage

Tête de rotation

Vitesses
Couple max.
Vitesse max.
Passage tête
Passage joint tournant

Drehkopf

Schaltstufe	6	
Drehmoment max.	1.230 daNm	9,072 lb-ft
Drehzahl max.	340 (*550) rpm	
Drehkopfdurchgang	93 mm	3,6 in
Spulkopfdurchgang	2"	

Morse

Diametro min. di presa
Diametro max. di presa
Forza di chiusura
Coppia svitaggi

Clamps

Min. handing
Max. handing
Clamping force
Breaking torque

Mors

Tige/diamètre min.
Tige/diamètre max.
Force de serrage
Couple de deserrage

Klemm

Durchmesser min.	45 mm	1,8 in
Durchmesser max.	360 mm	14,1 in
Klemmkraft	280 KN	62,946 lbs
Brechvorrichtung	3.500 daNm	25,814 lb-ft

Argano

Tiro max.
Capacità fune
Velocità fune
Diametro fune

Winch

Max. line pull
Drum capacity
Rope speed
Rope diameter

Treuil

Force de levage
Câble au tambour
Vitesse au retrait
Diamètre du câble

Seilwinde

Max. zugkraft	2.000 daN	4,496 lbs
Seillänge	50 mt.	164 ft
Seilgeschwindigkeit	30 mt./min.	98 ft/min
Seildurchmesser	10 mm	0,39 in

Ingombri

Lunghezza
Larghezza
Altezza

Dimensions

Length
Width
Height

Dimensions

Longueur
Largeur
Hauteur

Aussenabmessungen

Länge	10.915 mm	35,8 ft
Breite	2.500 mm	8,2 ft
Höhe	3.100 mm	10,2 ft

Peso

Weight

Poids

Gewicht

20.000 Kg	40,000 lbs
-----------	------------

(* Opzionale • Optional • Option • Option




Opzioni ed Accessori • Options and Accessories
Options et Accessoires • Options und Zubehör

MC
1200



Morsa doppia	Double clamp	Groupe mors double	Doppelzange	360 mm	14,1 in
Morsa semplice	Single clamp	Mors simple	Einfachzange	360 mm	14,1 in
Martello idraulico	Hydraulic drifter	Tête à rotocoussion	Hydraulikbohrhammer	EURODRILL-KRUPP-KLEMM	
Doppia testa	Double head	Double tête	Doppelkopfanlage		
Mandrino idraulico	Hydraulic chuck	Chuck hydraulique	Hydraulischer Spannkopf	Ø 90 mm	Ø 3,5 in
Argani speciali	Special winches	Treuilis spéciaux	Spezielle Seilwinde		
Mast speciali	Special masts	Mâts de forage spéciaux	Spezialmast		
Prolunga per jet grouting	Jet grouting extension	Rallonge pour jet grouting	Mastverlängerung für HDBV	3 x 5.000 mm	3 x 16,4 ft
Timer per jet grouting	Timer for jet grouting	Temporisateur pour jet grouting	Schrittsteuerung für HDBV		
Pompa schiumogeno	Foam pump	Pompe à mousse	Bohrschaumpumpe	30/75 lt/min	8/20 gal/min
Pompa triplex	Triplex pump	Pompe triplex à pistons	Triplexpumpe	90/200 lt/min	24/53 gal/min
Pompa a vite	Screw pump	Pompe à vis	Schraubpumpe	150 lt/min	40 gal/min
Lubrificatore di linea	D.T.H. lubricator	Graisser de ligne	Schmiersystem	8,5 lt	2,2 gal
Saldatrice / generatore	Welder unit / generator	Groupe de soudure	Schweißstromaggregat	220A – 6,5 KVA	
Carrello estrattore	Casing extractor	Extracteur hydraulique	Hydraulischer Förderer		
Caricatore aste	Rod carousel	Chargeur de tiges	Spindelladung		
Radiocomando	Remote radio control	Radiocommande	Funkfernsteuerung		

MC
1200

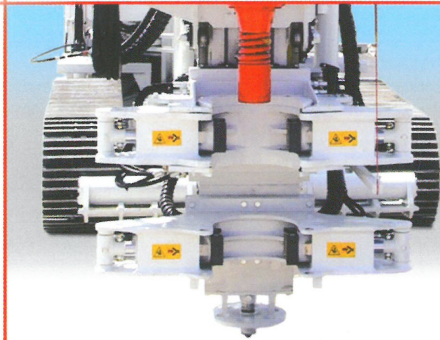


Rebuilding of
"LA FENICE" Theatre
Venice - Italy





MC
1200

Dimensioni di Ingombro • Overall Dimensions
Dimensions • Aussenabmessungen

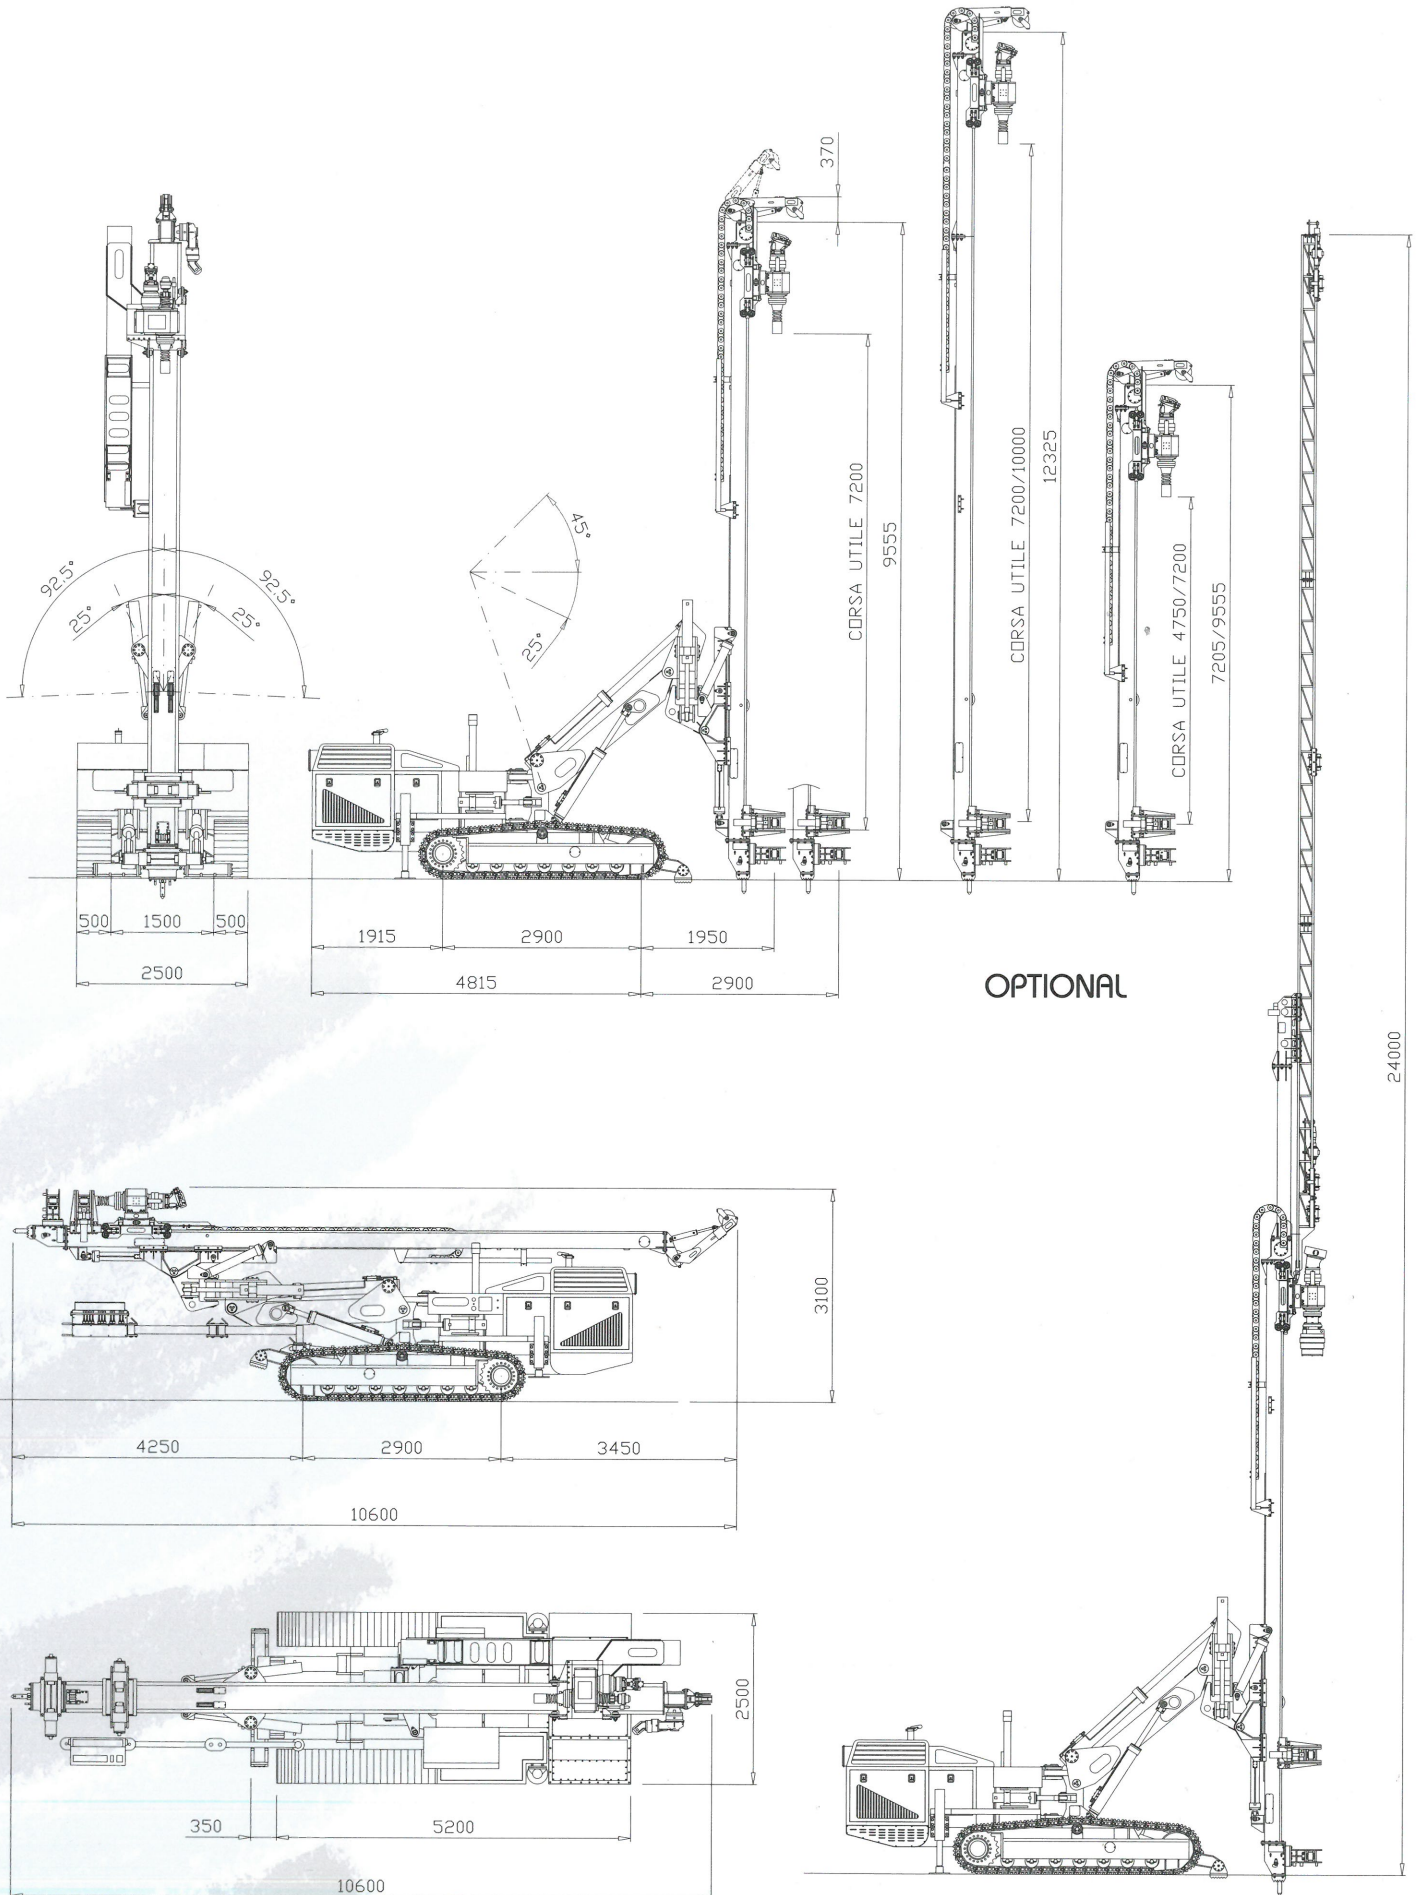

OPTIONAL

JET GRUOTING CONFIGURATION

Movimenti Mast • Mast Movements
Cinématique du Bras • Volle Gelenkmöglichkeit

MC
1200

